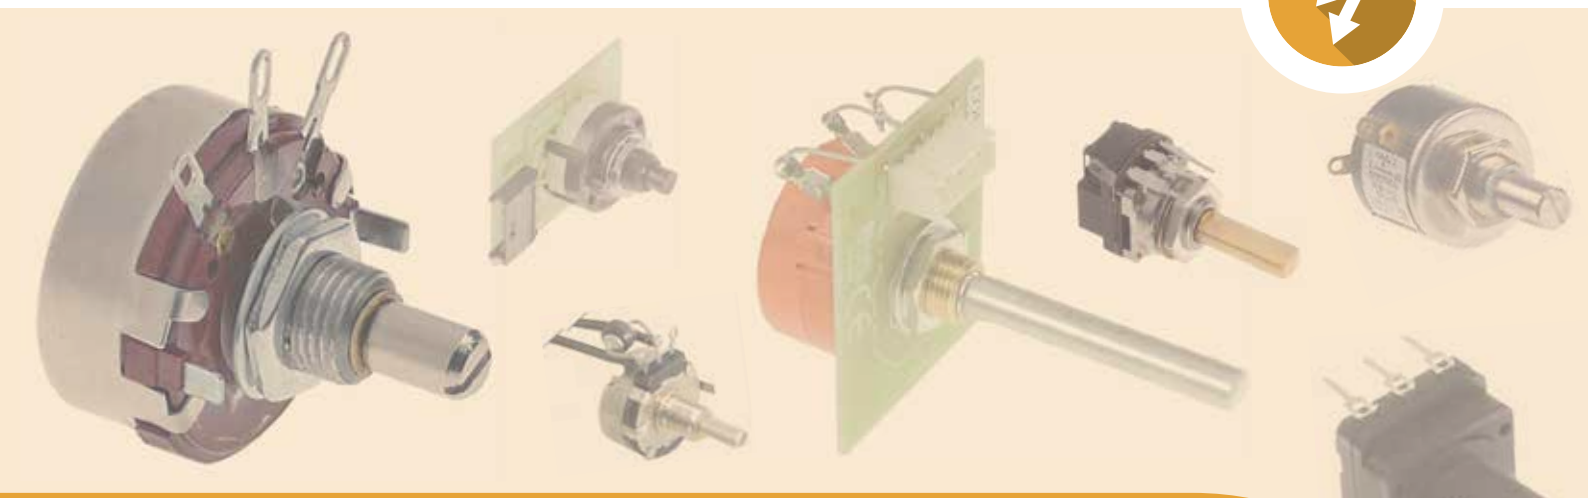


encoders and potentiometers

7

Ambach 368
Angelo-Po 368
Baron 368
Berner 368
Bertos 368
Convotherm 368
Cookmax 368
EGO 369
Electrolux 369
Fagor 369
Fimor 369
Foster 369
FriFri 369
Gico 370
Giorik 370
Hatco 370
Henkelman 370
Hoonved 370
Hounö 370
Krefft 370
Küppersbusch 370
Lainox 370
Lotus 371
Mareno 371
MKN 371
Olis 371
Öztiryakiler 371
Pizza-Group 371
Rational 371
Roller Grill 371
Rosinox 372
Scholl 372
Sharp 372
Sirman 372
Tecnoinox 372
Therma 372
Zanolli 372

encoders and potentiometers

Ambach


1


2

fig.	GEV No.	description	Ref. No.
1	401338	encoder	R65321450
2	347436	operation switch 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	5003518422

Angelo-Po


1

fig.	GEV No.	description	Ref. No.
1	300230	potentiometer	32V5580

Baron


1


2


3

fig.	GEV No.	description	Ref. No.
1	401338	encoder	LAR65301450
2	300252	potentiometer 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	CR0737320
3	300188	potentiometer rotation angle 310° oven	BN3103260

Berner


1

fig.	GEV No.	description	Ref. No.
1	300249	operation switch 2 operating positions 2NO switching sequence 0-1 16A shaft ø 6x4,6mm	LP1-100108

Bertos


1

fig.	GEV No.	description	Ref. No.
1	347599	operation switch 2 operating positions 4NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	38151200

Convotherm


1

fig.	GEV No.	description	Ref. No.
1	300098	potentiometer	5009095

Cookmax


1


2


3

fig.	GEV No.	description	Ref. No.
1	401338	encoder	R65301450
2	401677	encoder for microwaves	—
3	401678	encoder for microwaves	—


4


5


6

fig.	GEV No.	description	Ref. No.
4	401953	PCB hand blenders VORTEX 230V with potentiometer	IB5944010
5	300362	potentiometer 0,1 KOhm rotation angle 270 ° confectioned cable length 28 mm shaft length 42 mm	IB5940920
6	402057	potentiometer 0,5 KOhm rotation angle 320 ° shaft length 12,8 mm shaft ø 6 mm 25 W 230 V	X02.13.330.00


7


8

fig.	GEV No.	description	Ref. No.
7	300227	potentiometer 100 KOhm rotation angle 270° cable length 600mm shaft length 42mm M10	—
8	300231	potentiometer 880 KOhm rotation angle 310 ° with switch shaft length 8 mm thread M10x0,75	0232100

Find the complete and up-to-date range of products in our GEV Webshop

EGO


1


2


3

fig.	GEV No.	description	Ref. No.
1	345331	operation switch 2 operating positions 1NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	78.94032.507
2	347436	operation switch 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	78.94032.009
3	347514	operation switch 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	78.94032.506


4


5


6

fig.	GEV No.	description	Ref. No.
4	345119	operation switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4,6mm shaft L 23mm	78.94010.000
5	347599	operation switch 2 operating positions 4NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	78.94031.519 78.94031.520
6	300252	potentiometer 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	78.94031.523

Electrolux


1


2


3

fig.	GEV No.	description	Ref. No.
1	348104	operation switch 10 operating positions 1NO sequence 0-1-2-3-4-5-6-7-8-9 16 A shaft ø 6x4.6mm	0C0084
2	345331	operation switch 2 operating positions 1NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	0G3299
3	347514	operation switch 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	0G3298


4


5


6

fig.	GEV No.	description	Ref. No.
4	346984	operation switch 2 operating positions 4NO switching sequence 0-1 32A shaft ø 6x4,6mm	0K5063
5	403557	potentiometer 0,6KOhm shaft ø 6mm shaft L 14mm cable length 155mm thread M9 plug type male faston	0C0974
6	402070	potentiometer 10KOhm rotation angle 360° shaft length 18mm M10x0,75 thread length 9mm	0G0317

Fagor


1


2


3

fig.	GEV No.	description	Ref. No.
1	300198	encoder	12030862
2	300253	encoder for combi-steamer cable length 125 mm shaft 6x4.6mm shaft L 16 mm	12024753
3	300254	encoder for combi-steamer cable length 160 mm shaft 6x4.6mm shaft L 16 mm	12018546


4


5


6

fig.	GEV No.	description	Ref. No.
4	401717	potentiometer	12020078
5	300197	potentiometer 4,7 KOhm rotation angle 360 ° with switch shaft length 22 mm shaft ø 5,9 mm	12032034
6	400106	pulser rotation angle 360 ° shaft ø 6 mm type CPC	12027410

Fimor


1

fig.	GEV No.	description	Ref. No.
1	403197	encoder	200001118

Foster


1

fig.	GEV No.	description	Ref. No.
1	403521	encoder shaft length 15mm	00-555396

FriFri


1

fig.	GEV No.	description	Ref. No.
1	400849	encoder rotation angle 360 ° for fryer cable length 300 mm shaft L 214 mm thread M10	101336

Gico



1

fig.	GEV No.	description	Ref. No.
1	345119	operation switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4,6mm shaft L 23mm	—

Giorik



1



2

fig.	GEV No.	description	Ref. No.
1	401169	encoder	6010102
2	300187	potentiometer 4,7 KOhm rotation angle 310 ° cable length 650 mm shaft length 20 mm	6010097

Hatco



1

fig.	GEV No.	description	Ref. No.
1	402057	potentiometer 0,5 KOhm rotation angle 320 ° shaft length 12,8 mm shaft ø 6 mm 25 W 230 V	X02.13.330.00

Henkelman



1

fig.	GEV No.	description	Ref. No.
1	300231	potentiometer 880 KOhm rotation angle 310 ° with switch shaft length 8 mm thread M10x0,75	0232100

Hoonved



1

fig.	GEV No.	description	Ref. No.
1	403273	encoder rotation angle 135 ° cycle shaft length 5 mm shaft ø 6 mm ø 26 mm	34908

Hounö



1

fig.	GEV No.	description	Ref. No.
1	403484	encoder cable length 90mm shaft 6mm shaft length 10mm	20900026

Krefft



1



2



3

fig.	GEV No.	description	Ref. No.
1	300058	potentiometer 5 KOhm	76-30400150
2	300059	potentiometer 5 KOhm rotation angle 310 ° shaft length 35 mm shaft ø 6 mm	76-30400151
3	300000	potentiometer 5,2 KOhm rotation angle 300 ° with switch shaft length 18 mm thread M10x0,75	76-30400268



4

fig.	GEV No.	description	Ref. No.
4	400106	pulser rotation angle 360 ° shaft ø 6 mm type CPC	76-88171303

Küppersbusch



1

fig.	GEV No.	description	Ref. No.
1	300189	potentiometer encoderKOhm	189009

Lainox



1



2

fig.	GEV No.	description	Ref. No.
1	401338	encoder	LAR65301450
2	403084	encoder cable length 200mm shaft 6x4,6mm shaft length 18mm	LAR65301941

Find the complete and up-to-date range of products in our GEV Webshop

Lotus



1

fig.	GEV No.	description	Ref. No.
1	346441	operation switch 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	537023400


Mareno



1

fig.	GEV No.	description	Ref. No.
1	300252	potentiometer 2 operating positions 2NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	CR0737320

MKN



1



2

fig.	GEV No.	description	Ref. No.
1	347952	operation switch 16 operating positions 3NO switching sequence 0-16 16A shaft ø 6x4,6mm	203894
2	401968	potentiometer with momentary function	203733

Olis



1

fig.	GEV No.	description	Ref. No.
1	300188	potentiometer rotation angle 310° oven	BN3103260

Öztiryakiler



1

fig.	GEV No.	description	Ref. No.
1	403313	potentiometer 2,5KOhm cable length 130mm L 44mm ø 22,5mm	6229.00034.09

Pizza-Group



1

fig.	GEV No.	description	Ref. No.
1	403205	potentiometer 10KOhm shaft length 10mm M10 shaft ø 6mm 2W type WTH118-1A ø 27,5mm	A96ZN00084

Rational



1



2



3

fig.	GEV No.	description	Ref. No.
1	300198	encoder	40.00.404
2	300197	potentiometer 4,7 KOhm rotation angle 360 ° with switch shaft length 22 mm shaft ø 5,9 mm	40.00.464
3	300058	potentiometer 5 KOhm	3040.0150



4



5



6

fig.	GEV No.	description	Ref. No.
4	300059	potentiometer 5 KOhm rotation angle 310 ° shaft length 35 mm shaft ø 6 mm	3040.0151
5	300000	potentiometer 5,2 KOhm rotation angle 300 ° with switch shaft length 18 mm thread M10x0,75	3040.0268
6	400106	pulser rotation angle 360 ° shaft ø 6 mm type CPC	8817.1303

Roller Grill



1

fig.	GEV No.	description	Ref. No.
1	300144	potentiometer 0,5 KOhm	A04005

Rosinox


1


2


3

fig.	GEV No.	description	Ref. No.
1	401338	encoder	RX94814233
2	403273	encoder rotation angle 135 ° cycle shaft length 5 mm shaft ø 6 mm ø 26 mm	RX94813831
3	345119	operation switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4,6mm shaft L 23mm	RX94814321


4

fig.	GEV No.	description	Ref. No.
4	300247	potentiometer 2,2KOhm rotation angle 270° cable length 150mm shaft length 16mm M10x0,75	RX94050333

Scholl


1

fig.	GEV No.	description	Ref. No.
1	345119	operation switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4,6mm shaft L 23mm	94010000

Sharp


1


2

fig.	GEV No.	description	Ref. No.
1	401677	encoder for microwaves	DPWBFC373WRKZ1
2	401678	encoder for microwaves	RVR-BA018WRE0

Sirman


1


2


3

fig.	GEV No.	description	Ref. No.
1	401953	PCB hand blenders VORTEX 230V with potentiometer	IB5944010
2	300362	potentiometer 0,1 KOhm rotation angle 270 ° confecti-oned cable length 28 mm shaft length 42 mm	IB5940920
3	300227	potentiometer 100 KOhm rotation angle 270° cable length 600mm shaft length 42mm M10	IB5940011

Tecnoinox


1

fig.	GEV No.	description	Ref. No.
1	345636	operation switch 2 operating positions 4NO sequence 0-1 16 A shaft ø 6x4.6mm shaft L 23 mm	RC01028000

Therma


1


2

fig.	GEV No.	description	Ref. No.
1	346984	operation switch 2 operating positions 4NO switching sequence 0-1 32A shaft ø 6x4,6mm	0K5063
2	402070	potentiometer 10KOhm rotation angle 360° shaft length 18mm M10x0,75 thread length 9mm	0G0317

Zanolli


1

fig.	GEV No.	description	Ref. No.
1	300189	potentiometer encoderKOhm	ELET0200

Find the complete and up-to-date range of products in our GEV Webshop